



## ATD-80063

### 13 Watt Angle Light w/25' Cord

# Owner's Manual

#### **Features And Specifications:**


- 13W super bright fluorescent bulbs provide 120 Lux brightness
- 25 ft 16/3 SJTOW cord remains flexible in cold weather and is oil & grease resistant
- High impact shatter-proof housing
- Drop resistant with high impact Lexan lens
- Tool tap outlet with power indicator & overload protection
- Includes 360° flexible ratcheting hook

#### **Operating instructions**

Simply plug into any 120 VAC outlet and turn on by pressing top of switch To turn off, depress bottom of switch.

#### **To Change Bulb:**

- Unplug unit from power supply
- Remove the two rubber band bumpers.
- Un-screw screws from lens.
- Open lens cover (A). Grasp end of bulb (B) and pull straight out.
- Slide in new bulb and push down firmly into socket.
- Replace and screw on the lens.
- Replace the two rubber band bumpers.


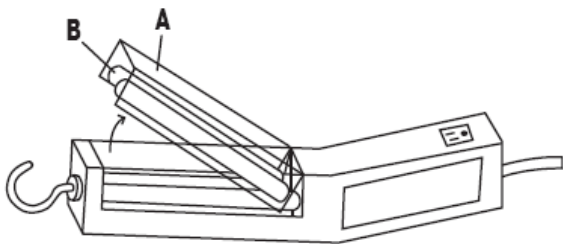


#### **Cautions**

- **Do NOT overload circuit** – Do not plug in more than 1500 watts or 12 amps into the base of this light. Check the amperage rating of the tool or appliance that you are using before connecting anything to the outlet(s) on this product to be sure that you are not overloading the circuit.
- **Do NOT service this reel light while it is plugged in.** It may cause electrical shock
- **Do NOT submerge in water.** – It may cause electrical shock and/or fires. To clean, wipe with damp cloth only, do not use solvents, and clean only when the unit is unplugged from power source.
- **Do NOT use this lamp in explosive atmosphere** - Near flammable liquids or where explosion proof lamps are required.
- The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

# ATD

## ATD-80063

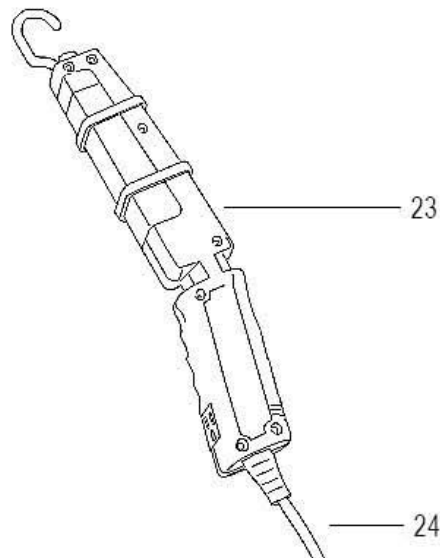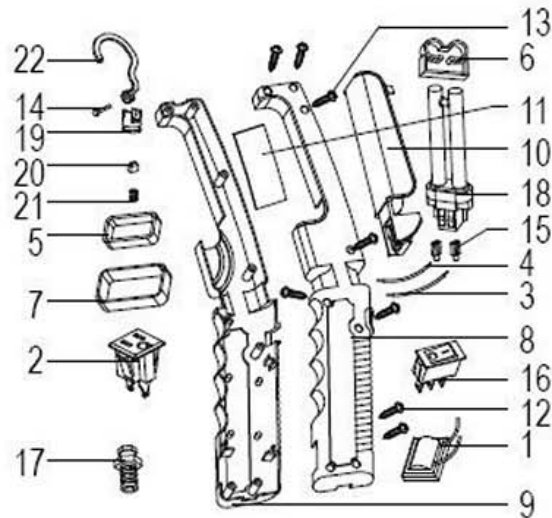

ITEM#	ORDERING PART#	PART DESCRIPTION
1	PRT80012-01	Ballast
2	PRT80012-02	Outlet
3	PRT80012-03	Wire (Black)
4	PRT80012-04	Wire (White)
5	PRT80012-05	Out ring, small
6	PRT80012-06	Inner protector
7	PRT80012-07	Out ring, large
8	PRT80012-08	Handle (Left)
9	PRT80012-09	Handle (Right)
10	PRT80012-10	Clear lens
11	PRT80012-11	Reflector paper
12	PRT80012-12	Screw, ST3.5*30

ITEM#	ORDERING PART#	PART DESCRIPTION
13	PRT80012-13	Screw, ST3*8
14	PRT80012-14	Rivet, $\phi 3 \times 16$
15	PRT80012-15	Seat, bulb
16	PRT80012-16	On/Off switch
17	PRT80012-17	Strain relief
18	EIKDT1365	Bulb
19	PRT80012-19	Holder, hook
20	PRT80012-20	Prop
21	PRT80012-21	Pressure spring
22	PRT80012-22	Hook
23	ATD80094	Complete Head Assy w/1' cord
24	PRT80004-30	25' Cord